

**2026 LODI TOWNSHIP AGREEMENT**

THIS AGREEMENT, made and entered into this 7<sup>th</sup> day of April, 2026, by and between the Township Board of Lodi Township ("Lodi Township"), Washtenaw County, and the Board of Washtenaw County Road Commissioners ("WCRC").

WHEREAS, Lodi Township desires that certain improvements be made upon the local roads in the Township of Lodi, and

WHEREAS, proper authority is provided to the parties of the agreement under the provisions in Act 51 of Public Acts of 1951 as amended,

IT IS NOW THEREFORE AGREED, the WCRC will accomplish the improvements as specified herein, all in accordance with the standards of the Board of Washtenaw County Road Commissioners,

IT IS FURTHER AGREED, Lodi Township shall pay WCRC for the actual project costs incurred for the project; and

IT IS FURTHER AGREED, the WCRC will submit an invoice to the Township on July 1, 2026, for 50% of the estimated project costs. Following project completion and final accounting of the project costs, WCRC will submit the final invoice for the actual remaining unpaid costs. The final invoice shall provide supporting detail and information, which reasonably identifies the actual project costs incurred by WCRC. The Township agrees to remit payment within 30 days from receipt of WCRC invoices.

**Textile Road, Ann Arbor Saline Road to Dell Road (1.97 Miles)**

Work to include drainage improvements, forestry, heavy brushing, shaping the existing surface, and the application of 6" of 23A Limestone (C.I.P.) (approximately 5,500 tons) with associated dust control and project restoration.

Estimated total project cost: \$ 170,000.00

**Alber Road, Weber Road to Bethel Church Road (.51 Miles)**

Work to include drainage improvements, shaping the existing surface, and the application of 6" of 23A Limestone (C.I.P.) (approximately 1,500 tons) with associated dust control and project restoration.

Estimated project cost: \$ 63,000.00

**Bethel Church Road, Dell Road to Grass Road (1.49 Miles)**

Work to include drainage improvements, shaping the existing surface, and the application of 4" of 23A Limestone (C.I.P.) (approximately 3,400 tons) with associated dust control and project restoration.

Estimated project cost: \$ 96,000.00

2026 Lodi Township Agreement

**Ellsworth Road, Zeeb Road to Gensley Road (1.49 Miles)**

Work to include drainage improvements, forestry, shaping the existing surface, and the application of 4" of 23A Limestone (C.I.P.) (approximately 3,400 tons) with associated dust control and project restoration.

Estimated project cost: \$ 112,000.00

**Diuble Road, Ellsworth Road to Pleasant Lake Road (1.01 Miles)**

Work to include drainage improvements, forestry, shaping the existing surface, and the application of 6" of 23A Limestone (C.I.P.) (approximately 3,400 tons) with associated dust control and project restoration.

Estimated project cost: \$ 104,000.00

**Diuble Road, Ellsworth Road to Waters Road (1.00 Mile)**

Work to include drainage improvements, forestry, shaping the existing surface, and the application of 6" of 23A Limestone (C.I.P.) (approximately 3,400 tons) with associated dust control and project restoration.

Estimated project cost: \$ 112,000.00

**Ellsworth Road, Maple Road to Ann Arbor Saline Road (.32 Miles)**

Work to include drainage improvements, forestry, shaping the existing surface, and the application of 6" of 23A Limestone (C.I.P.) (approximately 800 tons) with associated dust control and project restoration.

Estimated project cost: \$ 63,000.00

**Ellsworth Road, Gensley Road to Parker Road (1.52 Miles)**

Work to include drainage improvements, forestry, shaping the existing surface, and the application of 4" of 23A Limestone (C.I.P.) (approximately 3,000 tons) with associated dust control and project restoration.

Estimated project cost: \$ 119,000.00

**Weber Road, Ann Arbor Saline Road to End of Pavement (1.15 Miles)**

Work to include chipseal and fogseal

Estimated project cost: \$ 65,000.00

**Neblo Road, Weber Road to End of Road (.10 Miles)**

2026 Lodi Township Agreement

Work to include chipseal and fogseal

Estimated project cost: \$ 20,000.00

**Ellsworth Road, Wagner Road to Ann Arbor Saline Road (.66 Miles)**

Work to include drainage improvements, forestry, shaping the existing surface, and the application of 4" of 23A Limestone (C.I.P.) (approximately 3,000 tons) with associated dust control and project restoration.

Estimated project cost: \$ 150,000.00

**AGREEMENT SUMMARY**

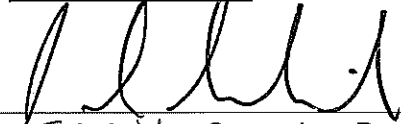
**2026 LOCAL ROAD PROGRAM**

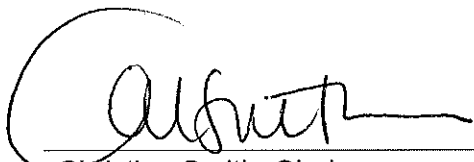
Textile Road, Ann Arbor Saline Road to Dell Road (1.97 Miles)	\$ 170,000.00
Alber Road, Weber Road to Bethel Church Road (.51 Miles)	\$ 63,000.00
Bethel Church Road, Dell Road to Grass Road (1.49 Miles)	\$ 96,000.00
Ellsworth Road, Zeeb Road to Gensley Road (1.49 Miles)	\$ 112,000.00
Diuble Road, Ellsworth Road to Pleasant Lake Road (1.01 Miles)	\$ 104,000.00
Diuble Road, Ellsworth Road to Waters Road (1.00 Mile)	\$ 112,000.00
Ellsworth Road, Maple Road to Ann Arbor Saline Road (.32 Miles)	\$ 63,000.00
Ellsworth Road, Gensley Road to Parker Road (1.52 Miles)	\$ 119,000.00
Weber Road, Ann Arbor Saline Road to End of Pavement (1.15 Miles)	\$ 65,000.00
Neblo Road, Weber Road to End of Road (.10 Miles)	\$ 20,000.00
Ellsworth Road, Wagner Road to Ann Arbor Saline Road (.66 Miles)	\$ 150,000.00
Subtotal	<u>\$ 1,074,000.00</u>

Less WCRC 2026 Local Matching Funds \$ 180,891.00

ESTIMATED AMOUNT TO BE PAID BY LODI TOWNSHIP: \$ 893,109.00

LODI TOWNSHIP:

  
\_\_\_\_\_  
Jacob Schauble, Supervisor Designee

  
\_\_\_\_\_  
Christina Smith, Clerk

WASHTENAW COUNTY ROAD COMMISSION:

\_\_\_\_\_  
Barbara Ryan Fuller, Chair

\_\_\_\_\_  
Matthew MacDonell, Managing Director